



VIOLET

AREAS OF APPLICATION

Shop • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospital • Factory • Facility
Designed to use in the areas requiring long-lasting and high lumen lighting.



VIOLET ARCHITECTURAL-D




UGR
<19

PRODUCT SPECIFICATIONS

- Body** : Dkp Steel Sheet / RAL9003
- Optic Cover** : PMMA Lens and Cover / 35°, 50°, 80°, 25x70°, Asym
- Driver** : Osram-Tridonic-Philips-3N
- Led Chip** : Samsung, Osram, Seoul
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP40
- Options** : Application Options :
Plaster Ceiling/Suspended Ceiling/
Clip In Mounted/Surface Mounted
Color Temperature : 3000K/4000K/6500K
Emergency Kit - DALI

TECHNICAL DRAWING



125
LM/W



RAL7001

RAL9005

RAL9003


ACCESSORY FOR PLASTER CEILING

Plaster Ceiling Spring Clip



R070.30.00150

PLASTER CEILING HOLE SIZE




50°

80°

25x70°

PHOTOMETRIC DISTRIBUTION

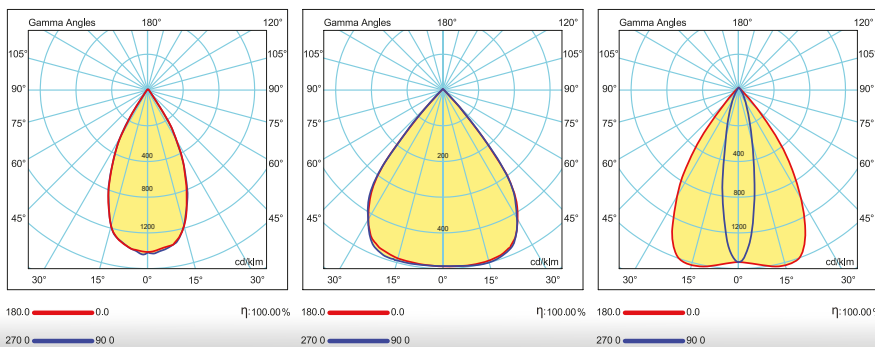

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/ Carton	Carton Size (LxWxH)	G.W/ Carton
LOF40.036 / Plaster	32W	4.000	3000/4000/6500	125lm/W	595x595x30mm	5	620x640x450mm	19.4 kg
LOF40.036 / Stonewool	32W	4.000	3000/4000/6500	125lm/W	595x595x30mm	5	620x640x450mm	19.4 kg
LOF40.036 / Surface M.	32W	4.000	3000/4000/6500	125lm/W	600x600x30mm	5	620x640x450mm	19.4 kg
LOF40.036 / Clip In	32W	4.000	3000/4000/6500	125lm/W	600x600x30mm	5	620x640x450mm	19.4 kg

*3N Company has the right to make any changes it deems necessary without prior notice.
*Technical data has a tolerance of ± 10%.