



# FONES


## AREAS OF APPLICATION

Shops • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospitals  
• Hangars • Warehouses • Factories • Facilities • Sports Facilities  
Designed for use in environments that demand long-lasting and high lumen lighting.




# FONES

WATERTIGHT LED LIGHTING

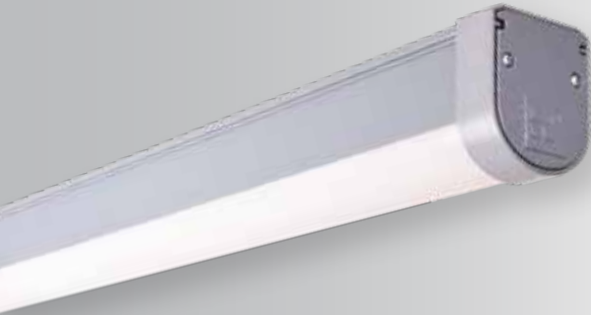


## PRODUCT SPECIFICATIONS


- Body** : PC CO EX Body RAL7001
- Optic** : PC Opal Diffuser
- Driver** : Osram-Tridonic-Philips-Lifud-Eagle Rise-Ledvance-3N
- Led Chip** : Seoul, Lumileds, Bridgelux
- Input Voltage** : 220-240V/AC 50-60Hz
- Temperature Range** : -10°C~+40°C
- CRI** : CRI > 80
- IP Class** : IP65
- Options** : Body Color Options: RAL9005/RAL9016  
Application Options: Surface Mounted/Cable Duct/Busbar  
Color Temperature: 3000K / 4000K / 6500K  
Emergency Kit - DALI

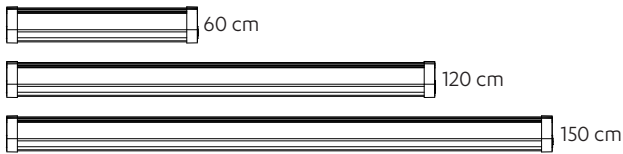

### PHOTOMETRIC DISTRIBUTION

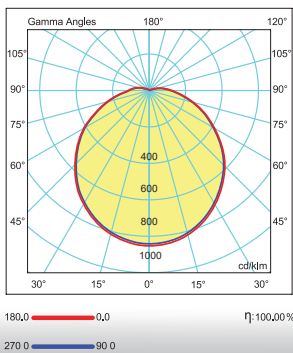

### TECHNICAL DRAWING

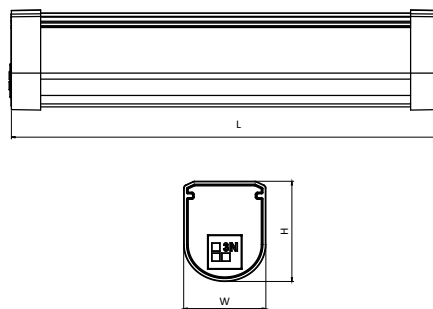

### ACCESSORIES



## PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LET50.020	20 W	2.000	3000/4000/6500	100lm/W	610x55x65 mm	40	1280x280x280 mm	13.50 kg
LET50.020	20 W	2.000	3000/4000/6500	100lm/W	1205x55x65 mm	20	1280x280x280 mm	13.50 kg
LET50.036	36 W	3.600	3000/4000/6500	100lm/W	1205x55x65 mm	20	1280x280x280 mm	13.50 kg
LET50.045	45 W	4.500	3000/4000/6500	100lm/W	1505x55x65 mm	20	1580x280x280 mm	16.70 kg

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.